


CKB Nude

Multilayer kraft board.

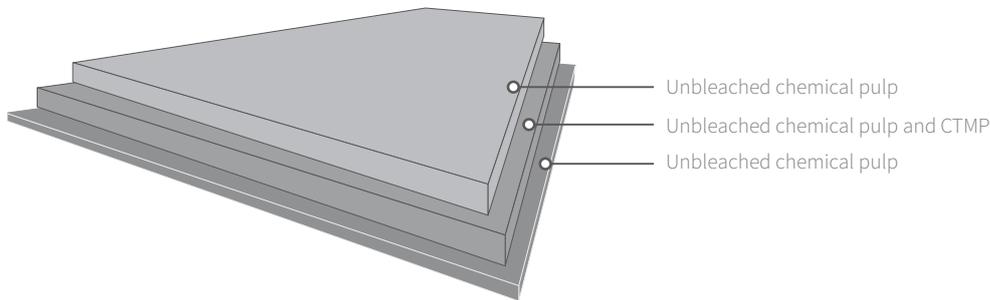

CKB Nude is an uncoated, brown, multilayer kraft back board made of unbleached chemical pulp and additional CTMP in the middle layer. The all-brown board has a natural look and feel, but is fully made of virgin fibre.

Technical specification

Property / Unit	Tolerance				Standards
Grammage, g/m²	±4%	205	230	255	ISO 536
Thickness, µm	±5%	380	445	495	ISO 534
Bending moment Taber 15° MD, mNm	-15%	12.9	19.2	26.3	TAPPI 489 om-99
Bending moment Taber 15° CD, mNm	-15%	5.1	7.7	10.5	TAPPI 489 om-99
Bending resistance L&W 15° MD, mN	-15%	266	400	544	ISO 2493
Bending resistance L&W 15° CD, mN	-15%	106	160	218	ISO 2493
Moisture, %	±1	7.5	7.5	7.5	ISO 287
Surface Smoothness, Bendtsen, ml/min, Top	max 700	400	400	400	SCAN P 84:02
Surface Smoothness, Bendtsen, ml/min, Reverse	max 2000	700	700	700	SCAN P 84:02
Tearing resistance MD, mN	-800	2900	3400	3900	TAPPI 496 sp-99
Tearing resistance CD, mN	-800	3300	3800	4300	TAPPI 496 sp-99
Cobb 60, g/m², Top		30	30	30	ISO 535
Cobb 60, g/m², Reverse		30	30	30	ISO 535

*All properties according to Skoghall Mill measurements from board machine production.
Laboratory test climate 23°C/50% RH (According to ISO 187).
Tolerances based upon 95% confidence limits, apply to delivered reel/pallet average.
Bending moment Taber 15° and Bending resistance L&W 15° are binding,
Bending moment Taber 15° calculated from Bending resistance L&W 15°.*

CKB Nude

Certificates

- Quality management ISO 9001
- Environmental management ISO 14001
- Product safety FSSC 22000
- Health and safety OHSAS 18001
- Energy management ISO 50001
- FSC® (FSC® C109143) and PEFC certified product available upon request.
- Paperboard is recyclable

Key characteristics and main enduses

CKB Nude has been designed to meet consumer preferences for sustainable, renewable and recyclable packaging materials with a natural look and feel. Made from pure virgin fibre, CKB Nude is a safe choice for food packaging but also for many other products, such as beverage, cosmetics and luxury packaging. CKB Nude provides a fantastic opportunity to differentiate a brand on the shelf. Its eye-catching and organic appeal embraces the beauty of nature's own shades of brown – creating a look that is both timeless and trendy. CKB Nude offers great stiffness, strength, runnability and convertibility.

Printing and finishing techniques

The product can be used with different printing techniques such as offset, flexo and digital printing. In digital printing, the product is suitable for several different sheet- or web-fed presses. Inkjet, dry or liquid toner technology can be used, although in some cases, pretreatment of the substrate might be required. The latest certification status can be verified on the press manufacturer's website or with local Stora Enso representatives.

It is important to check the limitations of the equipment, particularly because of the exceptional difference in the thickness and stiffness of board compared with paper in the same grammages. When running thicker substrates, the press manufacturer's recommendations should be referred to for optimal grain direction. Essentially all of the same finishing processes apply to both digitally printed and offset printed work. Since a wide variety of digital printing equipment is available in the market, it is important that a new commercial print job is always preceded by a trial run, including all required printing and converting process phases. The product works very well with different finishing techniques, such as embossing, hot foil stamping and others.

Storage recommendations

For optimal printing results, the moisture proof wrapping should not be removed until the board has reached the temperature of the press room.

Pallet/Reel Weight (kg)	Difference in temperature between board and press room (press room temp. approx. 20°C)		
	10°C	20°C	30°C
400 kg	2 days	2 days	3 days
800 kg	2 days	3 days	4 days
1200 kg	2 days	4 days	5 days

The product properties, according to the specifications, are guaranteed for 12 months after the production date. In order to ensure product safety, the product must be well wrapped and stored indoors, sheltered from rain and snow. The recommended storage conditions are 50-55% relative humidity and 20-23°C.